



TC6520-10

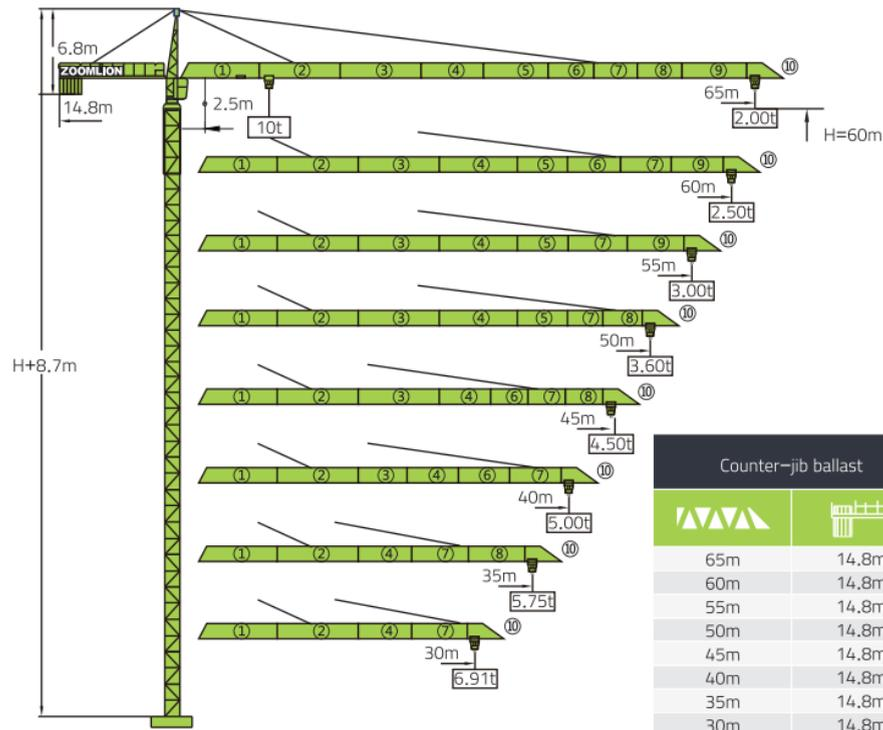


Counter-jib ballast		3000-2000kg		
		(kg)	PHZ3000	PHZ2000
65m	14.8m	25000	7	2
60m	14.8m	24000	8	0
55m	14.8m	23000	7	1
50m	14.8m	22000	6	2
45m	14.8m	20000	6	1
40m	14.8m	17000	5	1
35m	14.8m	14000	4	1
30m	14.8m	13000	3	2

Final product specification shall be in accordance with purchase order or sales contract only

塔身 Masts / 反力 Reactions / TC6520-10D

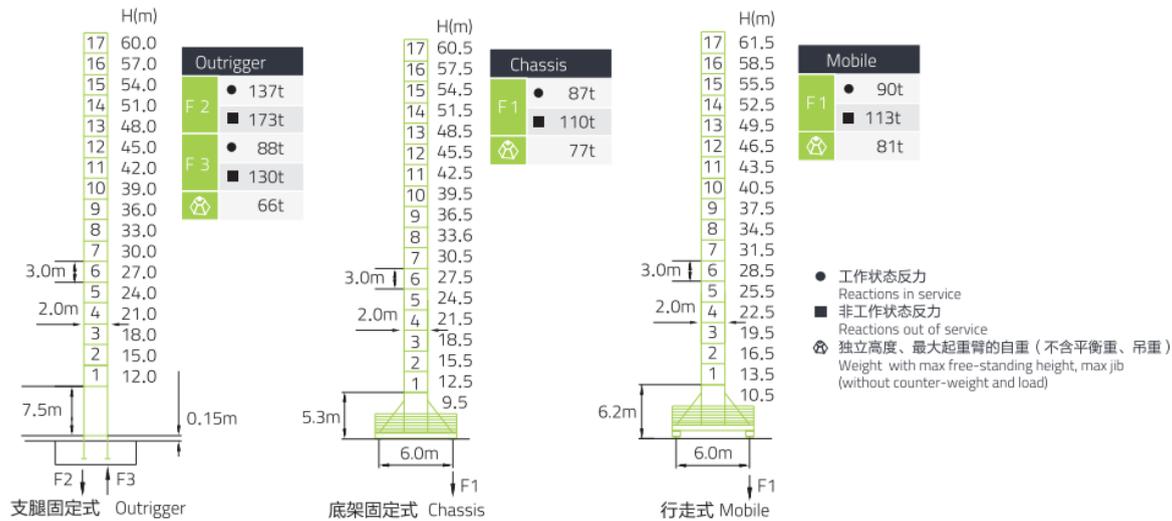


附着 Anchorages / TC6520-10D

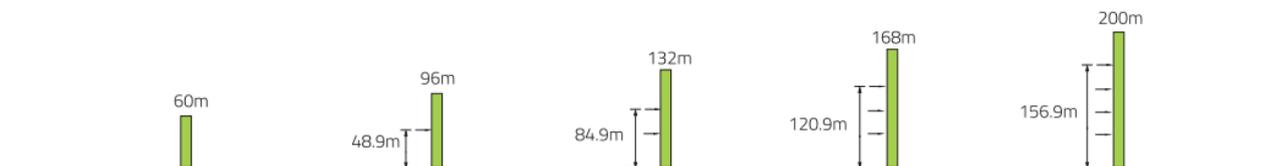


TC6520-10

塔身 Masts / 反力 Reactions / TC6520-10E

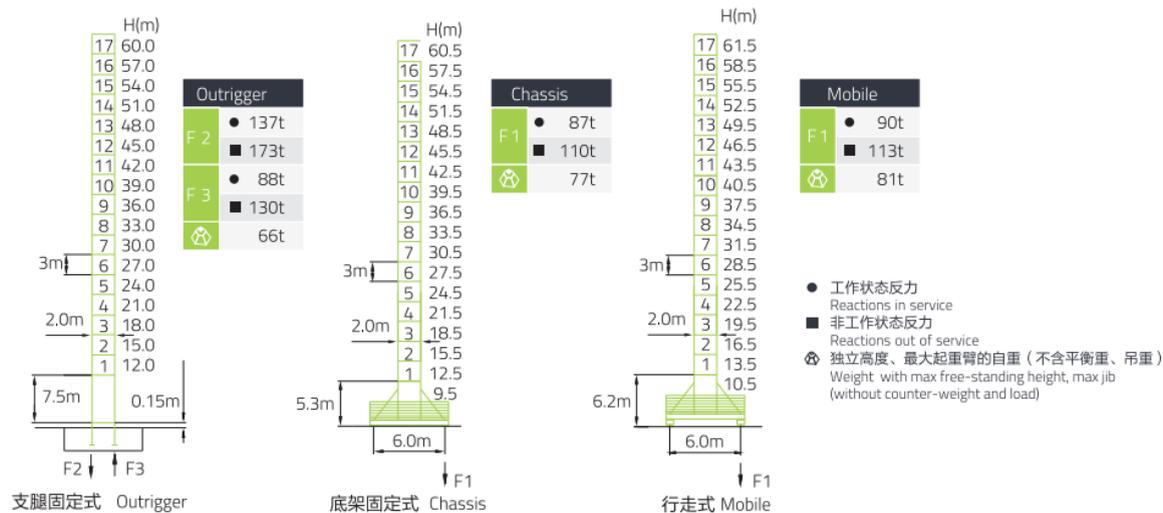

附着 Anchorages / TC6520-10E

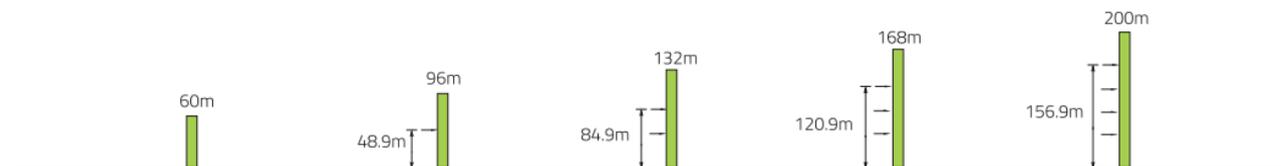

起重特性 Load Diagrams

R(m)	Max Capacity m/t	Capacity (m/t)																							
		15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0			
65 (R=66.8)	☺	5.00										4.93	4.51	4.14	3.82	3.54	3.29	3.07	2.87	2.69	2.53	2.38	2.24	2.12	2.00
	☺☺	10.0	10.0	8.58	7.47	6.59	5.88	5.29	4.79	4.37	4.00	3.68	3.40	3.15	2.93	2.73	2.55	2.39	2.24	2.10	1.97	1.86			
60 (R=61.8)	☺	5.00										4.96	4.56	4.22	3.91	3.64	3.40	3.18	2.99	2.81	2.65	2.50			
	☺☺	10.0	9.38	8.18	7.23	6.45	5.81	5.28	4.82	4.42	4.07	3.77	3.50	3.26	3.04	2.85	2.67	2.51	2.36						
55 (R=56.8)	☺	5.00										4.84	4.48	4.16	3.87	3.62	3.39	3.19	3.00						
	☺☺	10.0	9.91	8.65	7.65	6.84	6.17	5.60	5.12	4.70	4.34	4.02	3.73	3.48	3.25	3.05	2.86								
50 (R=51.8)	☺	5.00										4.74	4.40	4.11	3.84	3.60									
	☺☺	10.0	9.12	8.08	7.22	6.52	5.92	5.42	4.98	4.60	4.26	3.96	3.70	3.46											
45 (R=46.8)	☺	5.00										4.82	4.50												
	☺☺	10.0	9.93	8.80	7.88	7.12	6.47	5.93	5.45	5.04	4.68	4.36													
40 (R=41.8)	☺	5.00																							
	☺☺	10.0	9.60	8.50	7.61	6.87	6.25	5.72	5.26	4.86															
35 (R=36.8)	☺	5.00																							
	☺☺	10.0	9.65	8.55	7.65	6.91	6.28	5.75																	
30 (R=31.8)	☺	5.00																							
	☺☺	10.0	9.65	8.55	7.65	6.91																			

TC6520-10

■ 传动机构 Mechanisms / TC6520-10D

配置 Configuration			b.d		b.b		kW	
			IV	V	IV	V		
 起升 Hoisting	QE10100E2/QP10100B	m/min	100	50	50	25	60/60	540m ① (6 layers)
		t	2.5	5	5	10		
 回转 Slewing	HVV95F.130	r/min	0~0.6				2x95	① 超出咨询我们 Consult us if overtop
	HPW55F.130B		0~0.7				2x5.5	
 变幅 Trolleying	BP55B	m/min	0~55				5.5	
	ZA52A-D ZC52A-D	m/min	0~25				2x5.2	
	380V(±10%)50Hz	76.5+2x5.2kW						

■ 传动机构 Mechanisms / TC6520-10E

配置 Configuration			b.d		b.b		kW	
			IV	V	IV	V		
 起升 Hoisting	QE10100B(415V/50Hz)	m/min	100	50	50	25	60/60	540m ① (6 layers)
		t	2.5	5	5	10		
 回转 Slewing	HVV95F1.130 (415V/50Hz) HVV95F2.130 (415V/50Hz)	r/min	0~0.6				2x95	① 超出咨询我们 Consult us if overtop
	BP55B		0~55				5.5	
 变幅 Trolleying	BP55B	m/min	0~55				5.5	
	ZA52A-D B52A-D	m/min	0~25				2x5.2	
	415V(±10%)50Hz	76.5+2x5.2kW						