

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 25/50, BP 25/50 D



Maximum reliability

Engine and V-belts protected against damage



Powerful vibration

Plastic mat for paving work (optional)




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BP 25/50	0,236
BP 25/50 D	0,245

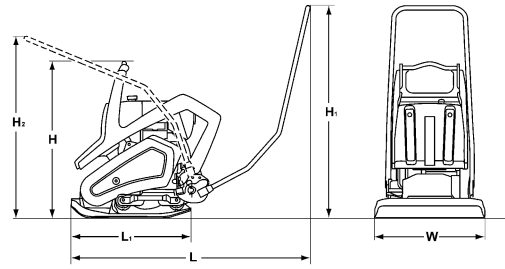

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Fully automatic decompression
- Recoil starter
- Engine protection frame
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- Protective covering
- 3-2-1 Warranty

Dimensions in mm

	H	H1	H2	L	L1	W
BP 25/50	658	962	700	1084	542	500
BP 25/50 D	708	962	700	1084	542	500

Optional Equipment

- Sprinkler system (+10kg)
- Transport wheels (+4kg)
- Plastic mat
- Special painting
- Service Kit (BP25/50)
- TOUGH WARRANTY
- Comfort guide handle
- Central comfort guide handle (BPR25/50)

Technical Data

Weights

Operating weight CECE	kg	108	122
Basic weight	kg	107	123

Dimensions

Working width	mm	500	500
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	30	30
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer	Honda	Hatz	
Type	GX 160	1B20	
Emission stage	CARB Phase III	non EPA	
Cooling	air	air	
Number of cylinders	1	1	
Performance ISO 3046	kW	3,6	3,1
Speed	min-1	3.600	3.000
Drive system	mech.	mech.	
Fuel	gasoline	diesel	
Fuel consump. aver. during operation	l/h	1,1	0,7

Exciter system

Frequency	Hz	92	92
Centrifugal force	kN	25	25
Amplitude	mm	1,11	1,11

Capacities

Fuel	l	3,1	3,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.



PRE 230 17 010

240216 Sa

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

